Test of the ISGRI strategy for Extremely bright transients

François Lebrun

4/29/09

1


ISGRI Test configuration


- ➤ The idea is to preserve the ISGRI sensitive area at high energy while that at low energy (where most of the counts are) can be reduced
- ▶ 10 ks staring at Crab in revolution 666
- ► Low threshold raised to step 62 (= 75 keV, max value) for module 4
- Low threshold raised to step 62 (= 85 keV, max value) for modules 0,2,3,5,6,7
- ► Module 1 in normal configuration


4/29/0


IUG 2009 Ap


2

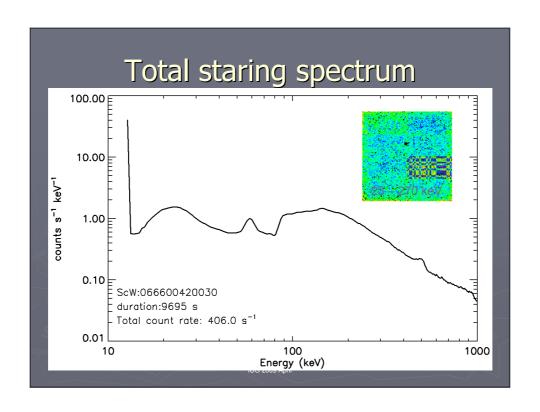


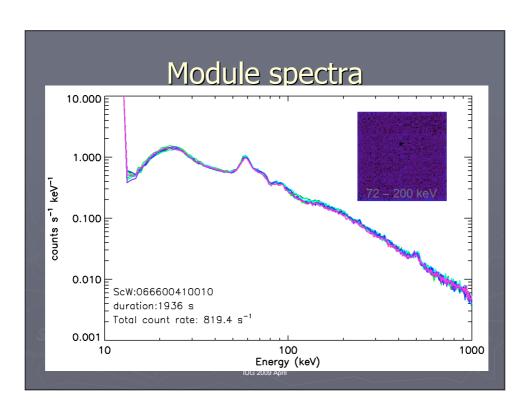

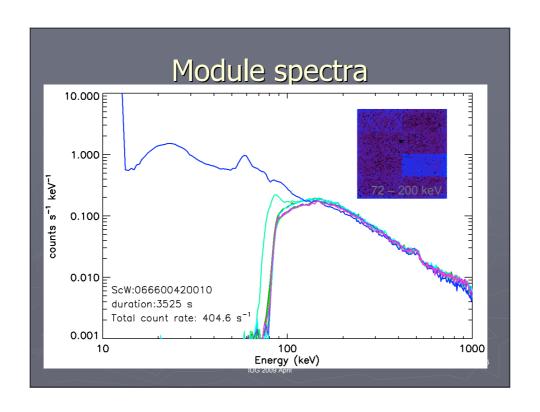

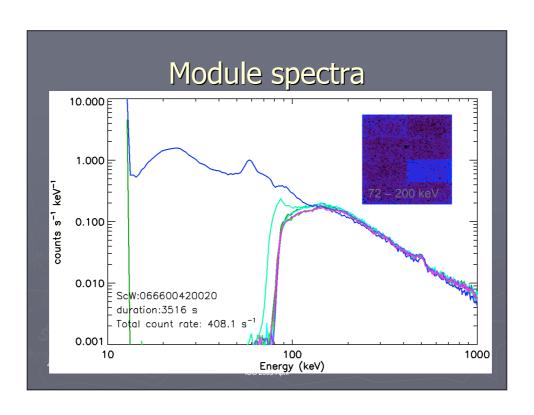

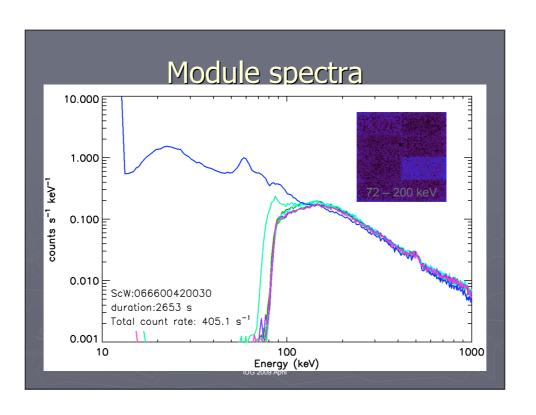

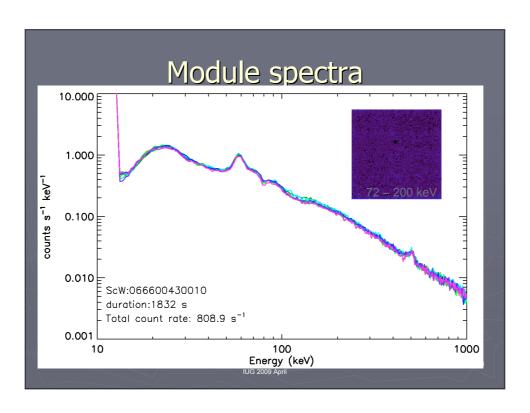

Conclusions

- ➤ Setting the ISGRI low threshold at step 62 for modules 0,2,3,4,4,6,7 (as in the test) reduces the count rate by a factor 2 for a bkg+Crab spectrum. It can be taken as the first step for sources up to ~ 5-10 Crab
- ▶ If the TM is still saturated, the next step is to switch-off progressively modules 3,7,4,0 (in this order). At the end, the expected count rate reduction is a factor ~3
- ► Leaving only one module ON with a normal low threshold setting achieves a count rate reduction of a factor 8

4/29/09

UG 2009 Apr

5